




PR400 Black Satin

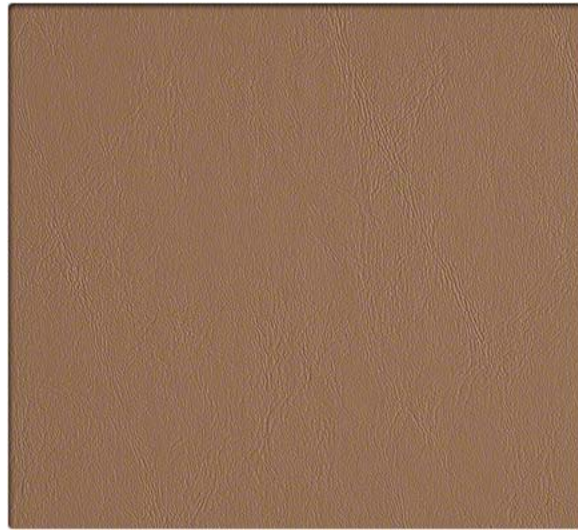


PR430 Velvet Brown

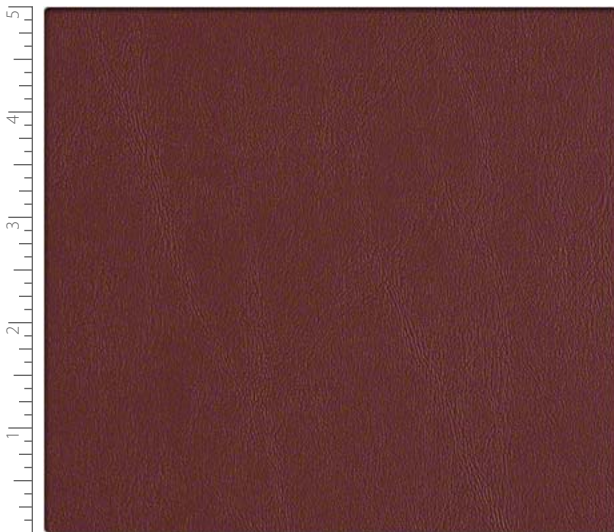


PR360 Cabernet

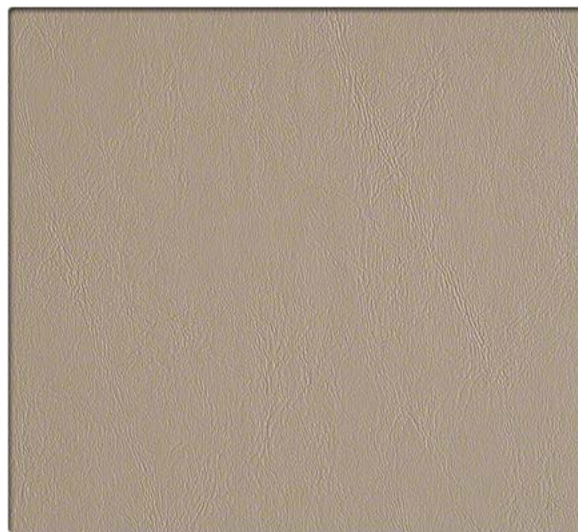

PR510 Cocoa

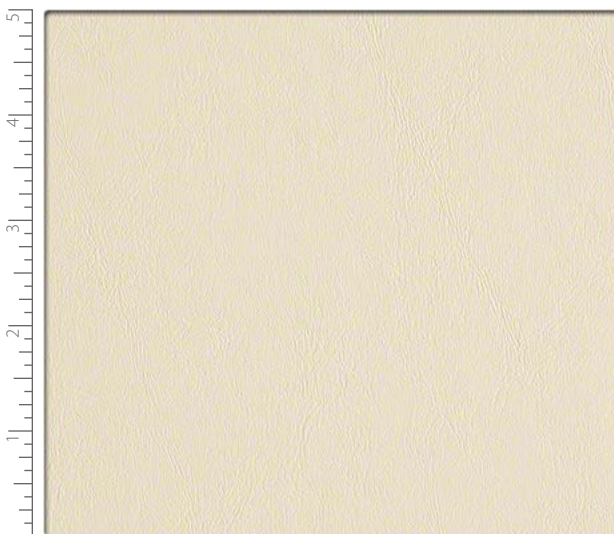


PR440 Cream

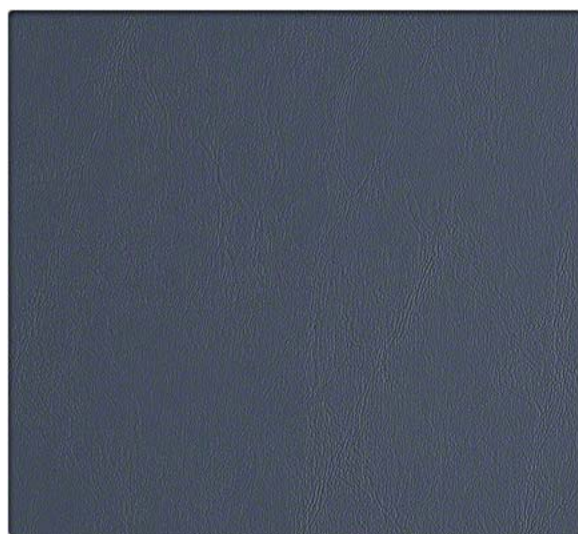


PR550 Deep Sapphire




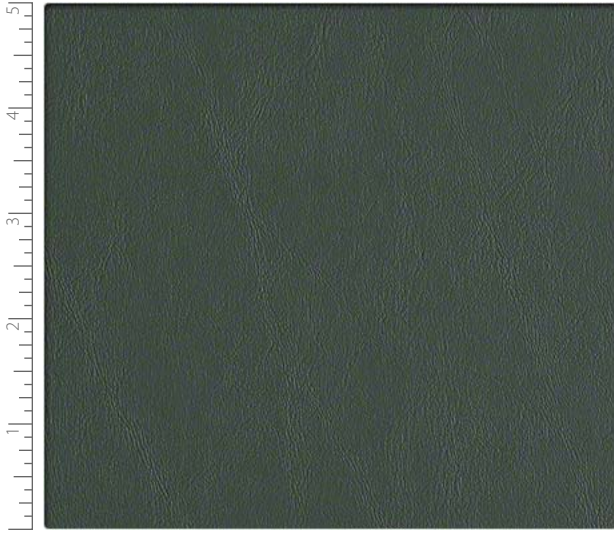


PR490 Deep Sea

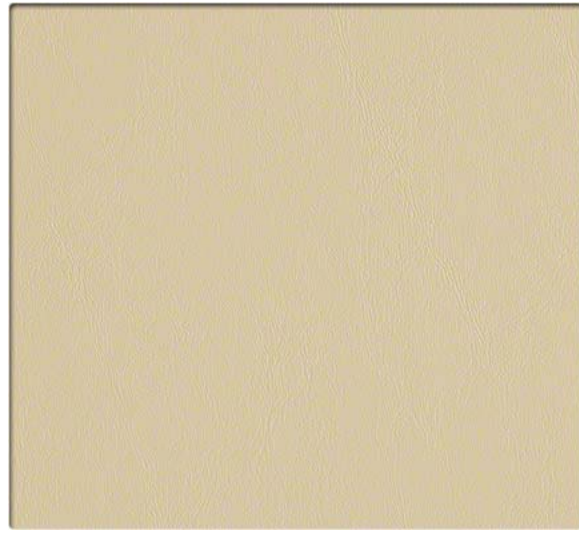


PR480 Doeskin

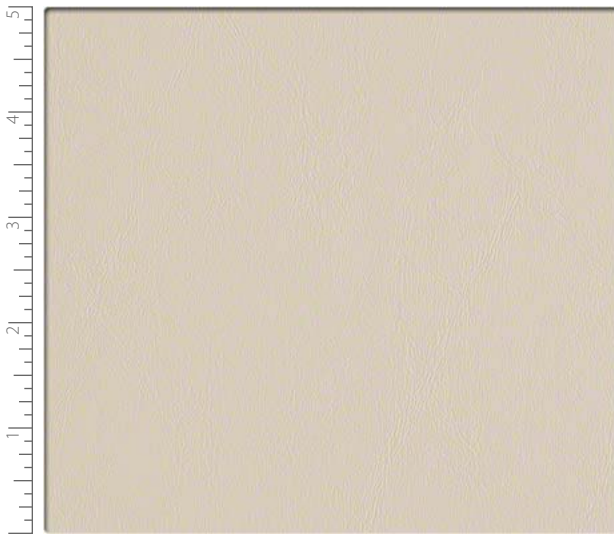

PR350 Fawn

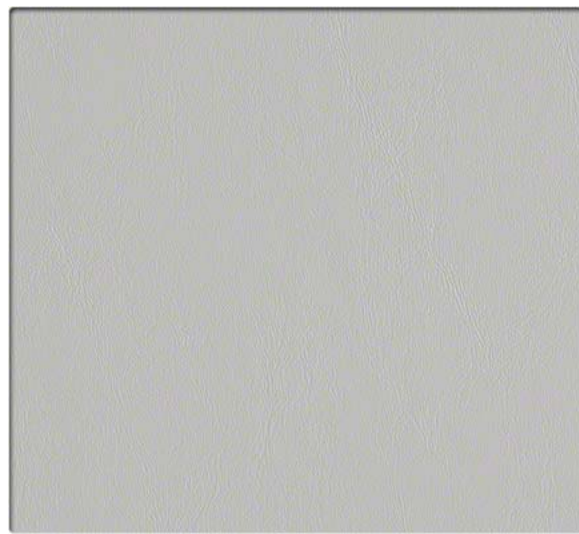

PR370 Feather

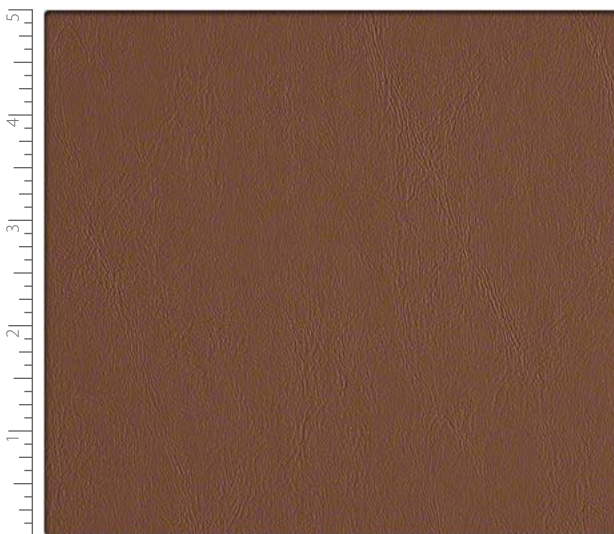


PR380 Harness




PR530 Ivy




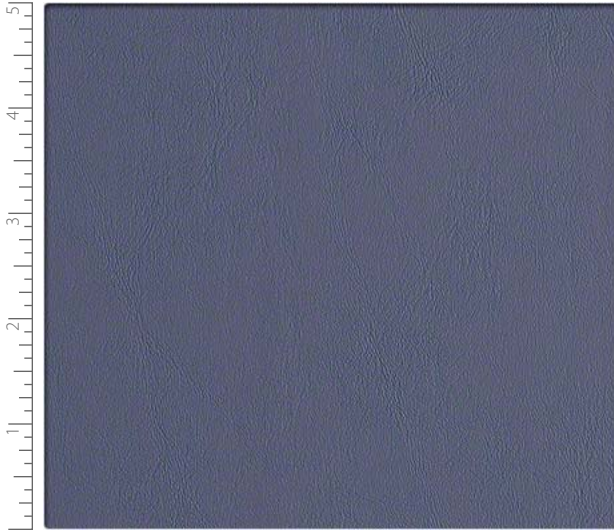


PR500 Lake Louise

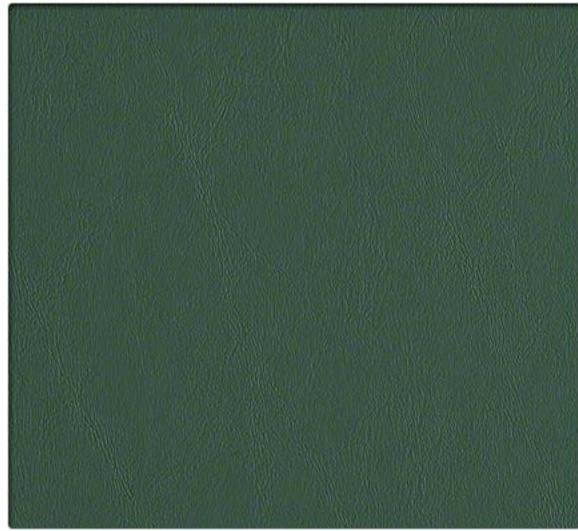


PR390 Laurel

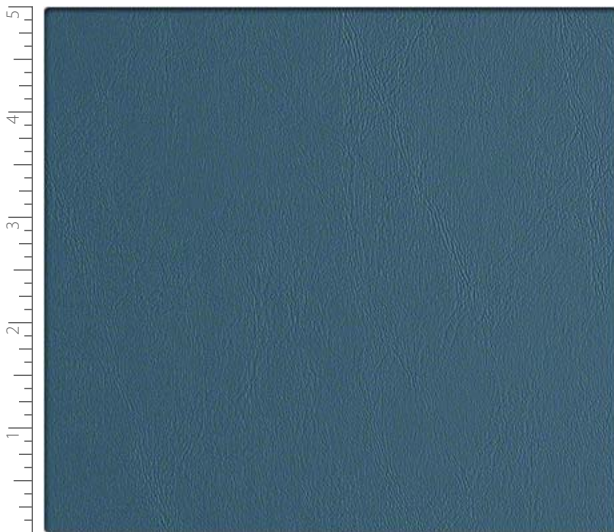


PR540 Mallard Blue

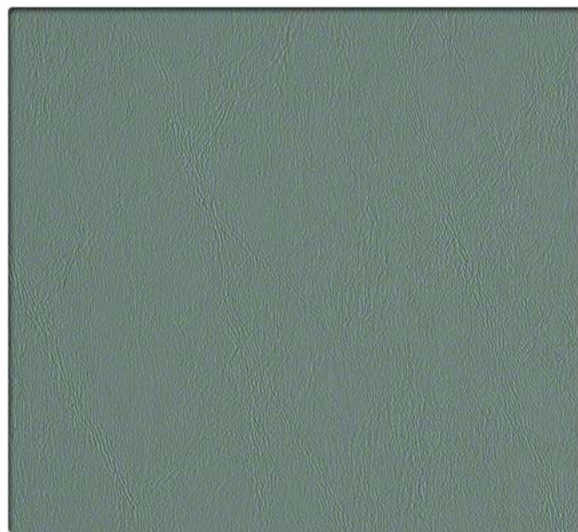


PR450 Mint Leaf

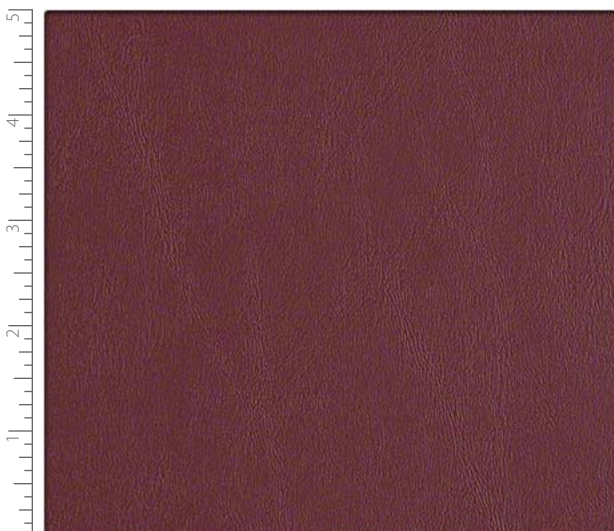


PR410 Mulberry

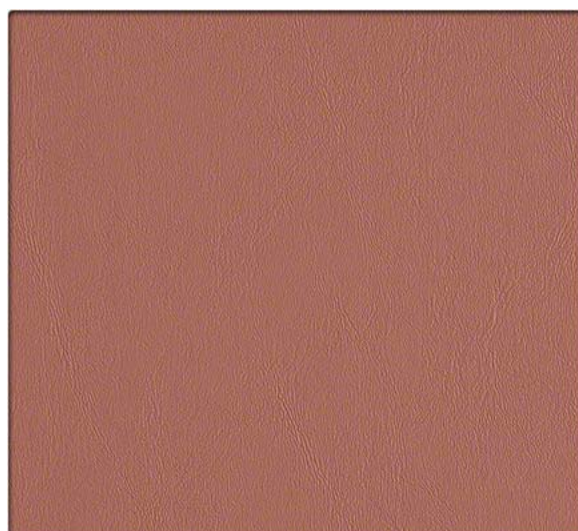


PR420 Rose Blush

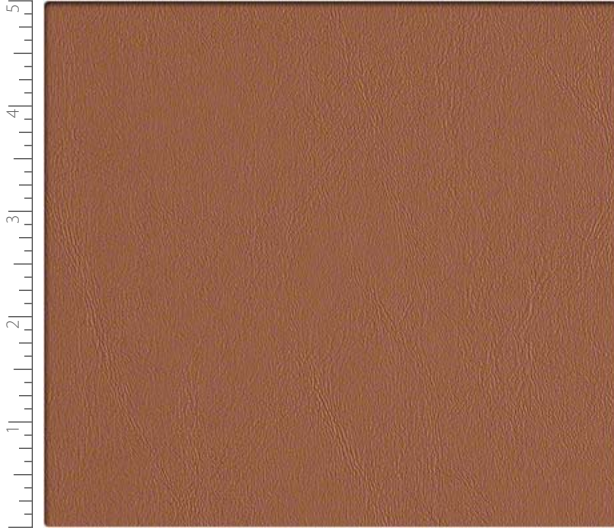


PR520 Saddle

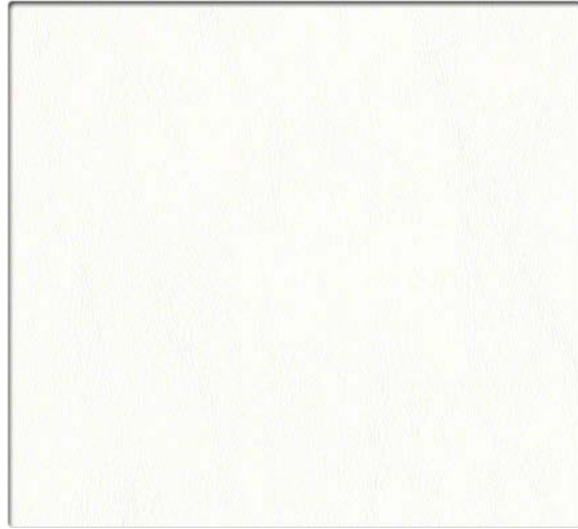

PR340 Soft White

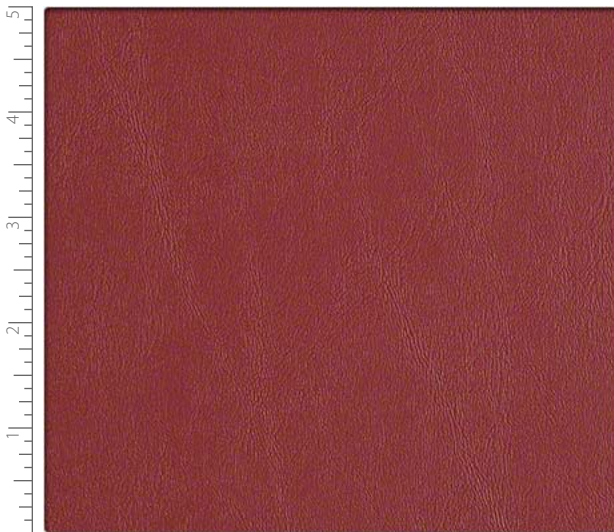

PR470 Tapestry Red

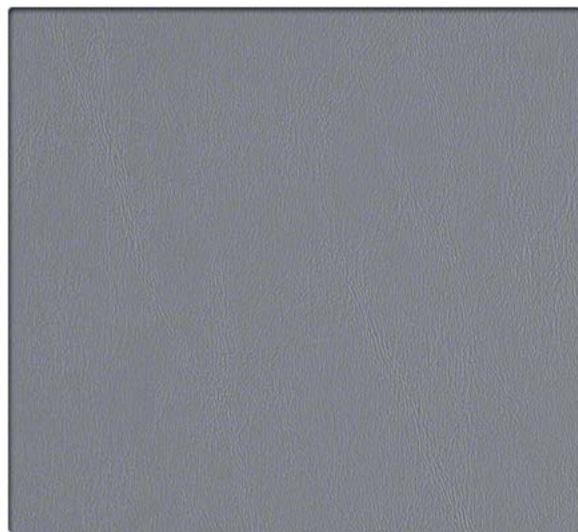

PR460 Blue Fog



## Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Fluid barrier
- Contains an antimicrobial agent
- Bleach-solution cleanable

## Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

Bleach solutions of up to 10% may be used for more difficult stains.

For additional cleaning information visit [cfstinson.com](http://cfstinson.com)

For complete specifications visit [cfstinson.com](http://cfstinson.com)

Dye lots may vary slightly.

\* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

\*\* Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

## Specifications



Content	Vinyl Surface with Polyester Backing
Finish	Advanced BeautyGard® soil and stain protection
Backing	Polyester
Weight	28.2 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Roll Size	35 yards

## Performance Characteristics

Abrasion Resistance** CFFA-1	Exceeds 1,000,000 double rubs - heavy duty
Break Strength CFFA-17	Warp: 70 lbs. min., Fill: 60 lbs. min.
Tear Strength CFFA-16	Warp: 15 lbs. min., Fill: 15 lbs. min.
Fluid Barrier	Inherent Fluid Barrier
Antimicrobial	This product features an antimicrobial agent which inhibits the growth of microbes on the protected surface.

## Flammability\*

California Technical Bulletin 117-2013 Section 1	Passed
NFPA 260	Class 1
MVSS 302	Passed
BIFMA	Class 1
May contribute to compliance with California Technical Bulletin 133 when used in conjunction with other suitable components.	



# Stinson®

C.F. Stinson, LLC  
2849 Product Drive  
Rochester Hills, MI 48309

P 800 841 6279  
F 248 299 3884

[cfstinson.com](http://cfstinson.com)