


RAL43 Adobe White




RAL36 Yew Green

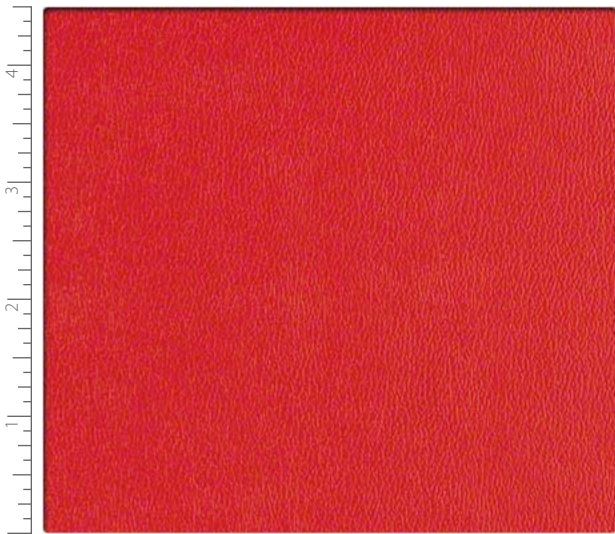


RAL39 American Beauty




RAL42 Black

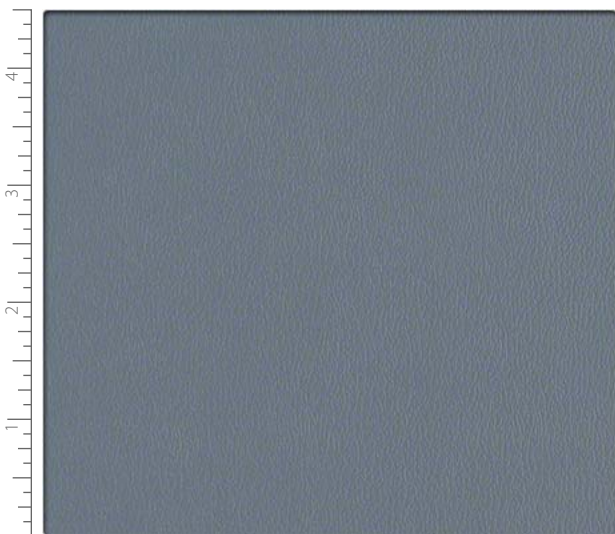


RAL49 Blue Ridge

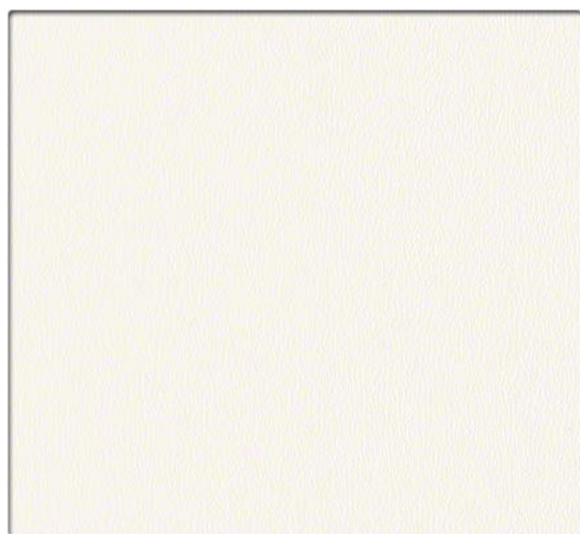


RAL53 Bright White

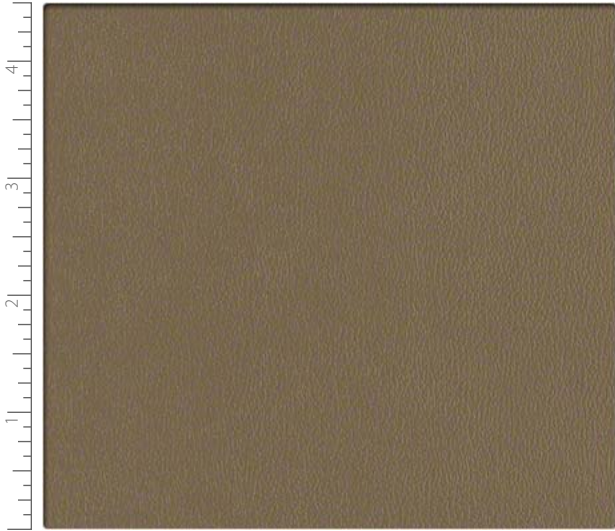


RAL57 Bronze

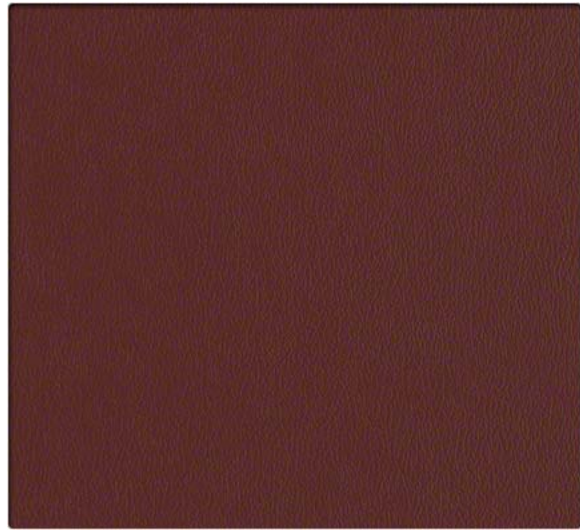


RAL41 Burgundy

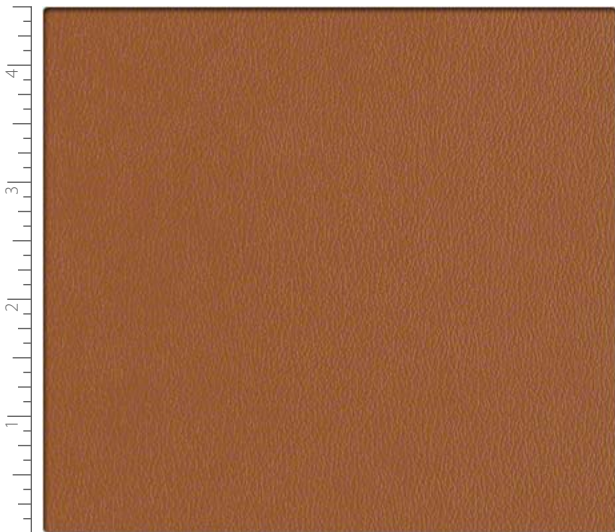

RAL56 Cinnabar

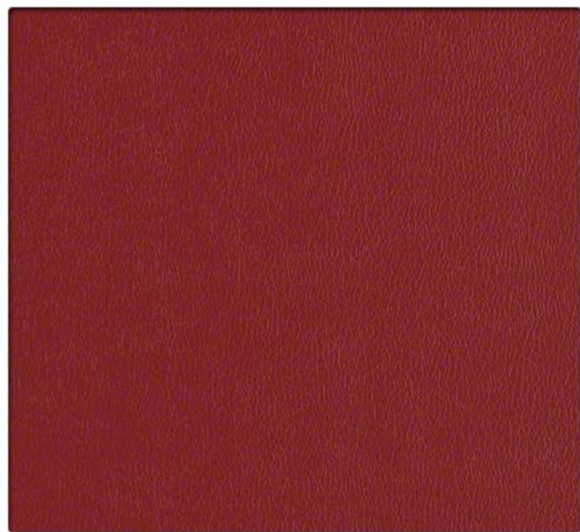


RAL38 Claret

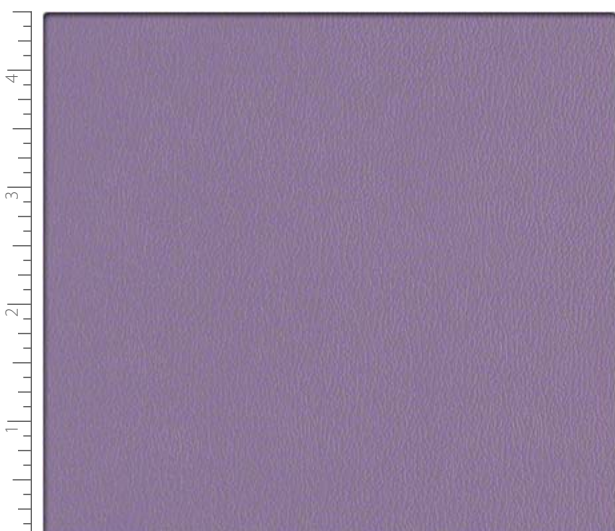


RAL51 Crocus



RAL44 Dove

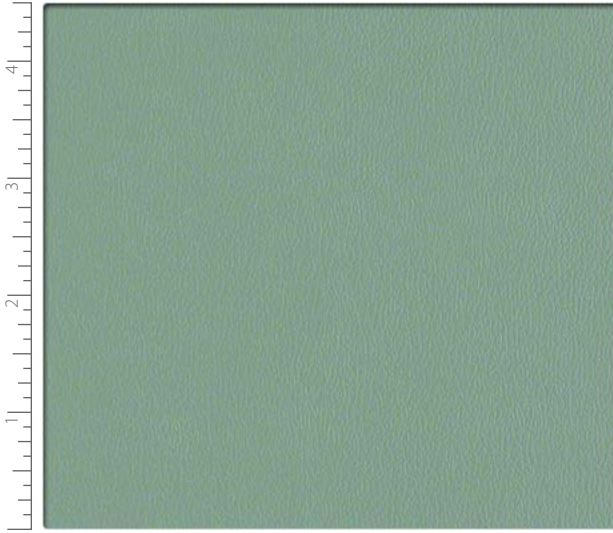

RAL46 Dusty Jade

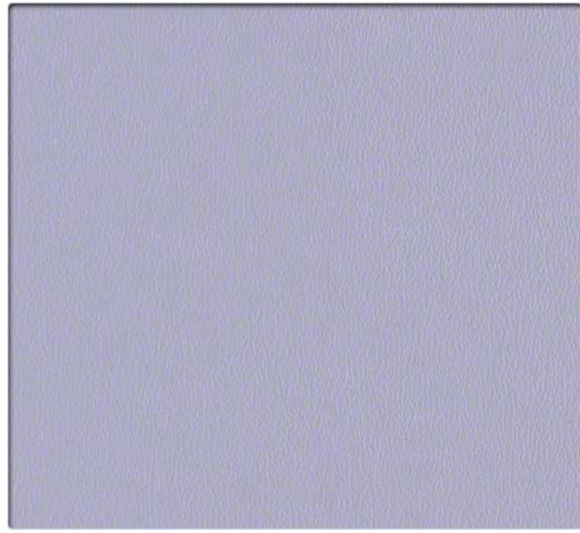


RAL54 Dutch Blue



RAL34 Forest




RAL48 Grotto

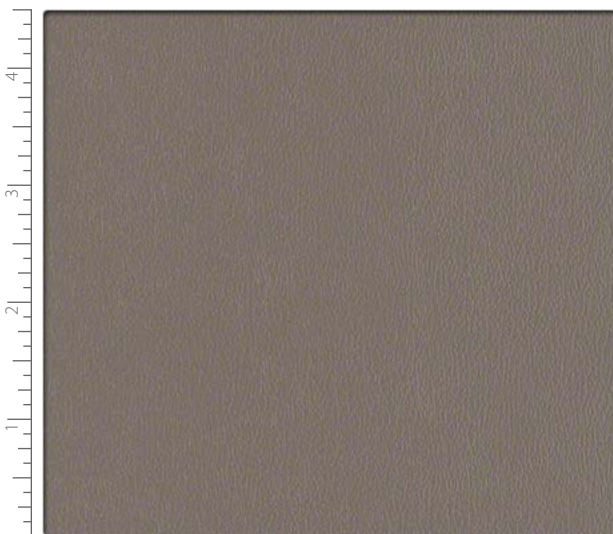


RAL63 Gunmetal




RAL50 Imperial Blue

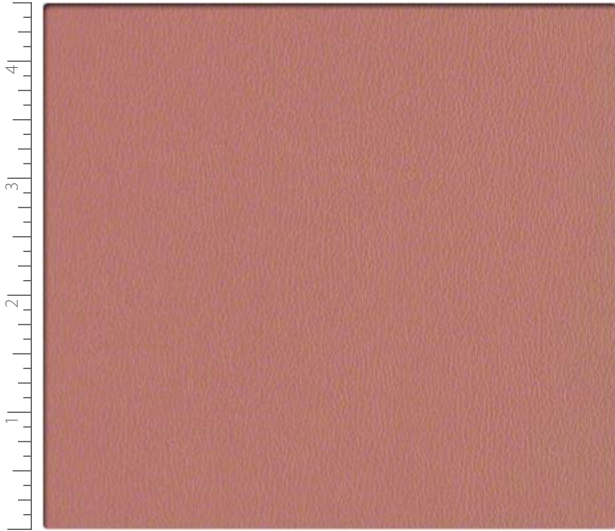

RAL45 Mauve

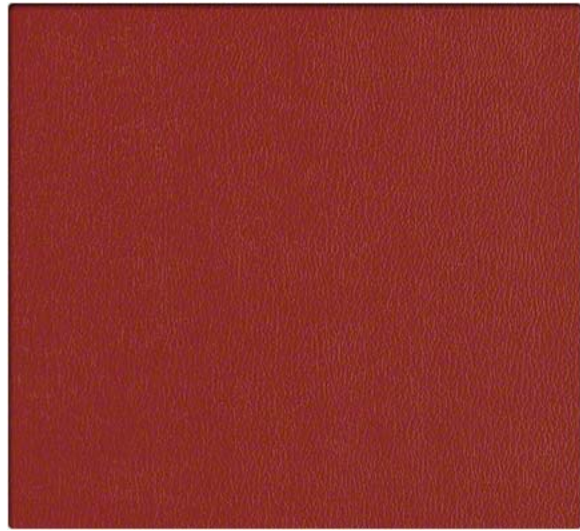


RAL65 Paprika

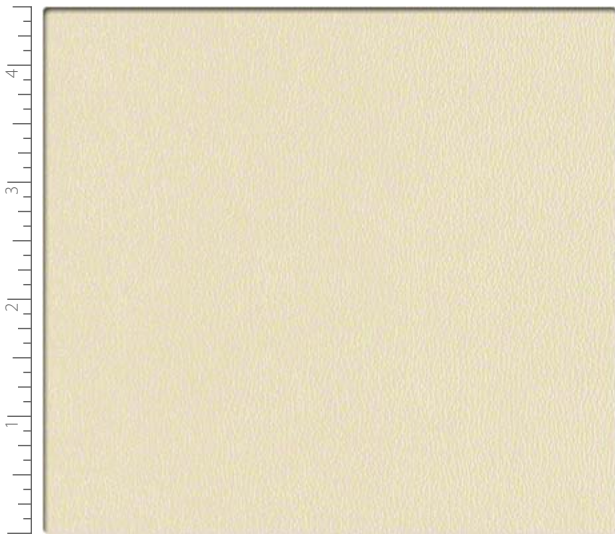


RAL59 Parchment




RAL40 Plum

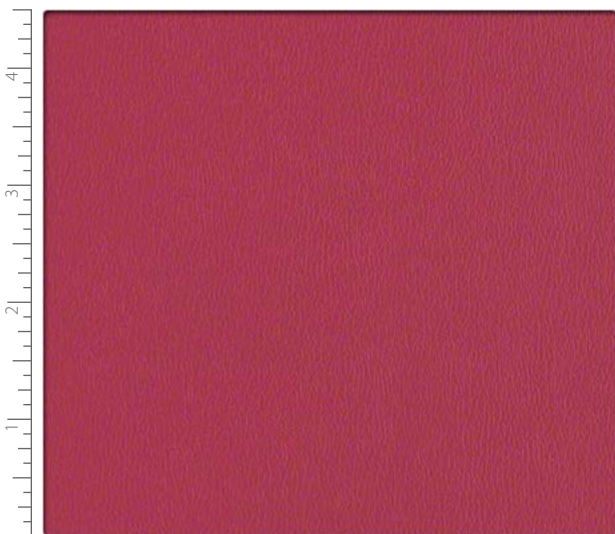


RAL62 Raspberry

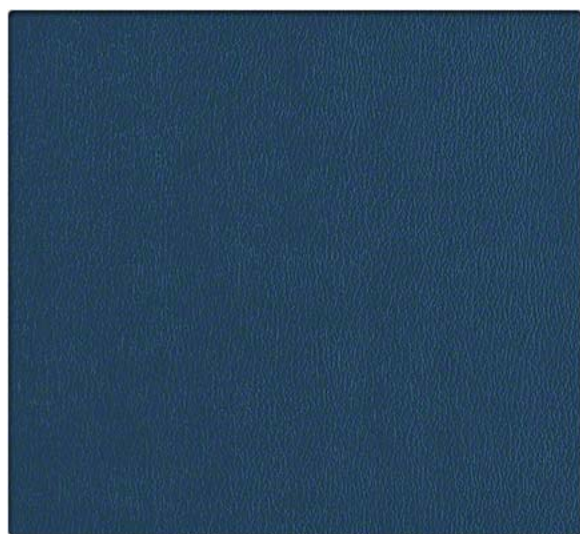


RAL35 Regimental Blue

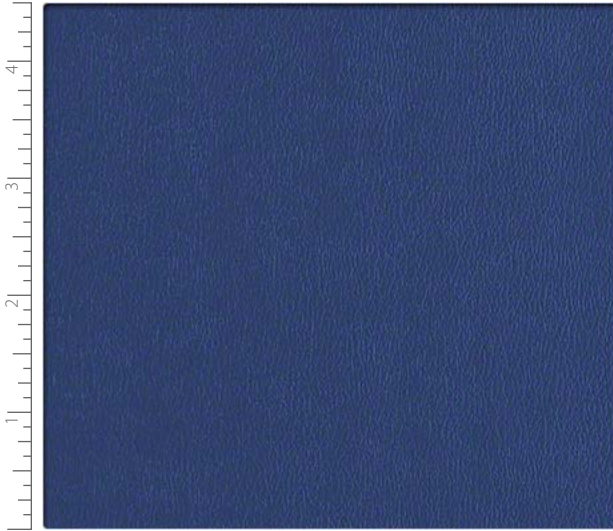


RAL37 Royal

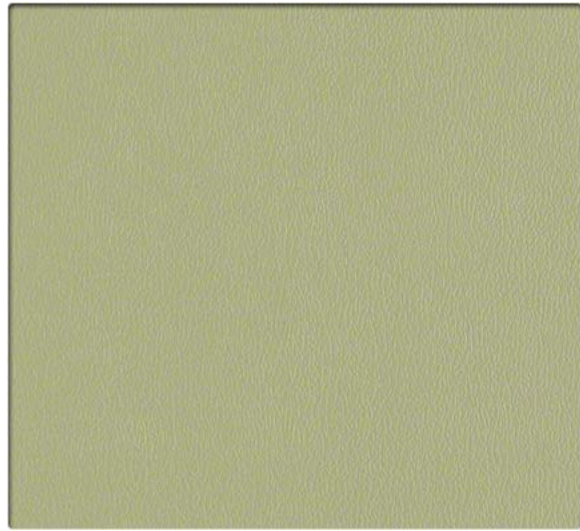


RAL58 Sage

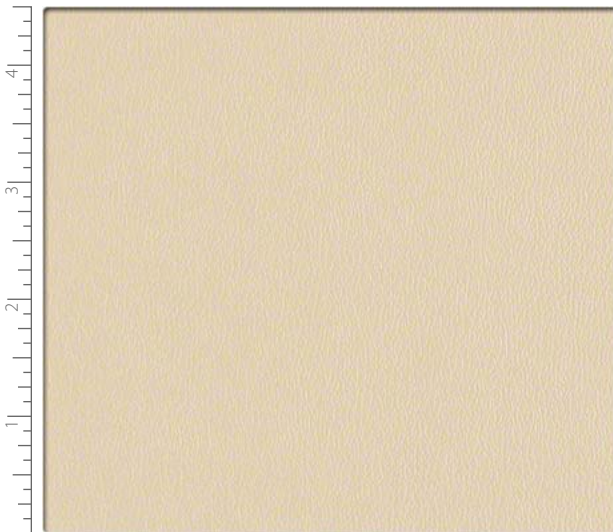

RAL64 Sand

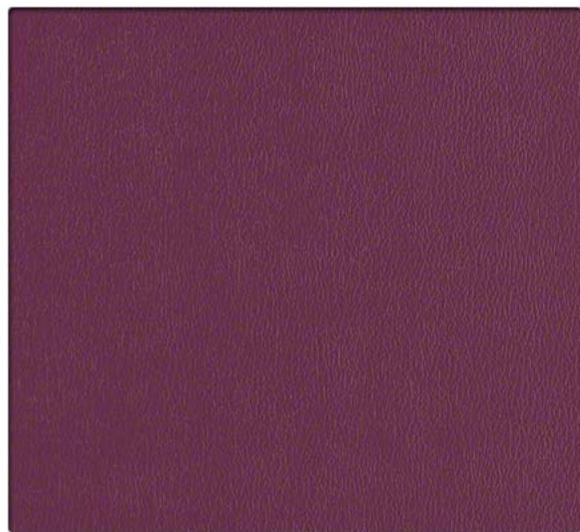


RAL52 Sangria

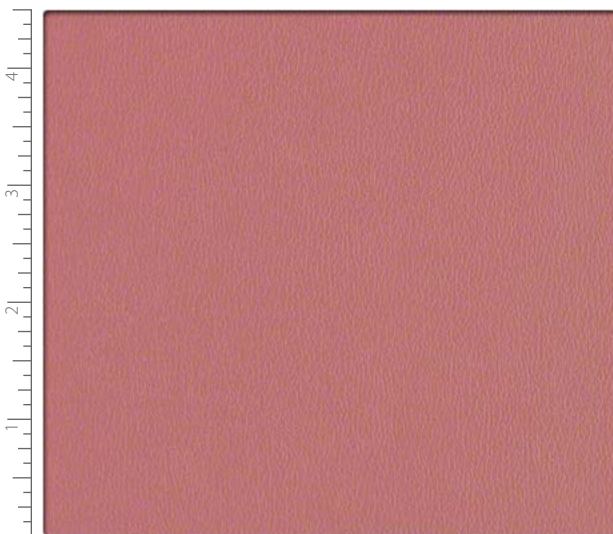


RAL61 Tea Rose



RAL55 Tomato

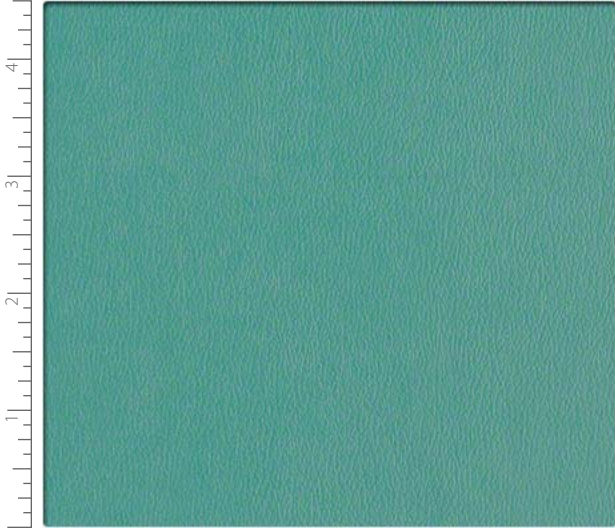

RAL47 Turquoise

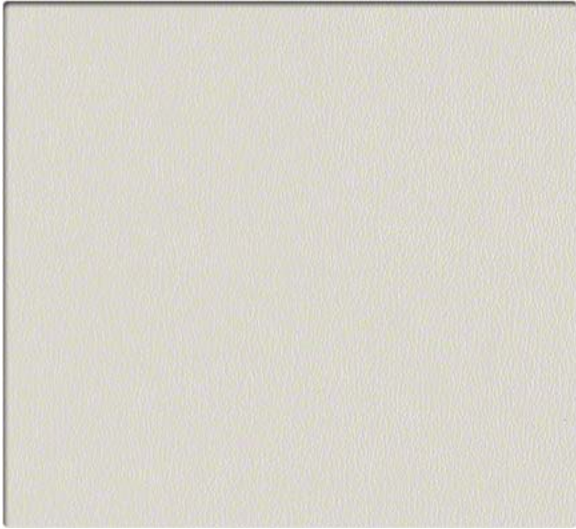

RAL60 Alabaster

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Fluid barrier
- Contains an antimicrobial agent
- Bleach-solution cleanable

Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

Bleach solutions of up to 10% may be used for more difficult stains.

For additional cleaning information visit cfstinson.com

For complete specifications visit cfstinson.com

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

** Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Specifications



Content	Vinyl Surface with Polyester / Cotton Backing
Finish	Advanced Soil and Stain Resistant Top Coat
Backing	Polyester / Cotton
Weight	28 oz./lin. yd. ± 1.5 oz.
Width	54 inches
Roll Size	35 yards

Performance Characteristics

Abrasion Resistance** CFFA-1	Exceeds 250,000 double rubs - heavy duty
Adhesion ASTM D-751	Warp: 3.0 lbs. min., Fill: 3.0 lbs. min.
Break Strength ASTM D-751-89	Warp: 55 lbs. min., Fill: 55 lbs. min.
Tear Strength ASTM D-1117-80	Warp: 12 lbs. min., Fill: 10 lbs. min.
Crocking AATCC-8	Dry: Class 4.0, Wet: Class 3.0
Fluid Barrier	Inherent Fluid Barrier
Antimicrobial	This product features an antimicrobial agent which inhibits the growth of microbes on the protected surface.

Flammability*

California Technical Bulletin 117-2013 Section 1	Passed
UFAC	Class 1
NFPA 260	Class 1
NY / NJ Port Authority (FTMS 191-5903)	Passed
Boston Fire Code BFD 1X-1	Passed
FAA 25.853 (a)	Passed
Federal Specification CID A-A-2950	Passed
MVSS 302	Passed
BIFMA	Class 1
IMO FTP MSC 307 (88) Part 8, 3.1 & 3.2	Passed

May contribute to compliance with California Technical Bulletin 133 when used in conjunction with other suitable components.



Stinson®

C.F. Stinson, LLC
2849 Product Drive
Rochester Hills, MI 48309

P 800 841 6279
F 248 299 3884

cfstinson.com